


Temperature switches & sensors

The **S30** series temperature switches and the **T/T** temperature sensors compliment our other engine monitoring equipment.

Using a curie point switching element the **S30** provides absolute repeatability, automatic re-setting, compact size, great reliability in use and long life.

There are five standard thread sizes each with three temperature settings, but other thread or temperature combinations can be offered if volumes are sufficient.

T/T sensors generally utilise a precision NTC or PTC thermistor and are custom designed to each application. Please ask for more information.

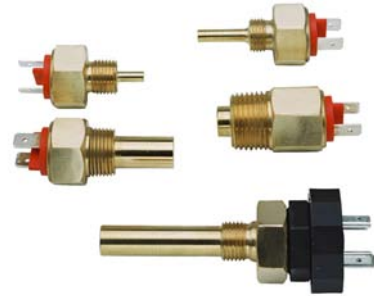

Specification (S30)

Construction:

Body: Brass
 Standard thread sizes: 1/2" NPTF, 3/8" BSPT, 1/2" BSPT and M18 x 1.5
 Cap: 15% Glass filled Nylon 6
 Terminals: 6.4mm spades, Earth or Isolated return.

Electrical:

Switching: 2.5A @ 250VAC
 Contacts: 1.6 A COS $\phi = 0.6$
 Switching tolerance: $\pm 5^\circ\text{C}$
 Switching differential: 10°C

Dimensions:

See below

Temperature:

Full range: $+50^\circ\text{C}/+ 150^\circ\text{C}$ in 10°C increments - subject to minimum quantity
 Standard products: $90^\circ\text{C}, 100^\circ\text{C}, 105^\circ\text{C}$ ($\pm 5^\circ\text{C}$)

Specification (T/T series)

Manufactured using thermistors and custom housings to suit each application.

